



东莞市卓庆电子有限公司

承 认 书

APPROVING SHEET

CUSTOMER

客 户: _____
PART NAME : Chip-Aluminum Electrolytic Capacitor
品 名: 片式铝电解电容器
SERIES: _____
系 列: JVD
SPECIFICATION: _____
规格: 全系列
DATE _____
日 期: 2020-08-10

制 造		客 户	
MANUFACTURE		CUSTOMER	
拟 制 FORMULATE	批 准 APPROVAL	检 验 CHECK	批 准 APPROVAL
满旭	李洋		

序号 No	目录 INDEX	页 page
1	概述 SCOPE	3
2	外形尺寸图及尺寸表 Case size table	3
3	技术性能 SPECIFICATIONS	4
4	称电容量、额定电压、额定纹波电流与外形尺寸对应表 Nominal capacitance, rated voltage, rated ripple current and case size table	5
5	构造图及材料表 Frame drawing and materials	6
6	试验方法及要求 TESTS	7-10
7	标志 Marking	11
8	片式铝电解电容的编带 V- Chip Type Aluminum Electrolytic Capacitors	12


一、概述 SCOPE

本产品规格书适用于 JVD 型片式铝电解电容器产品。


The product specification is adapted to series JVD V-CHIP Aluminum Electrolytic Capacitors of

二、外形图及尺寸表 Case size table

1. $\phi 4 \sim \phi 6.3$

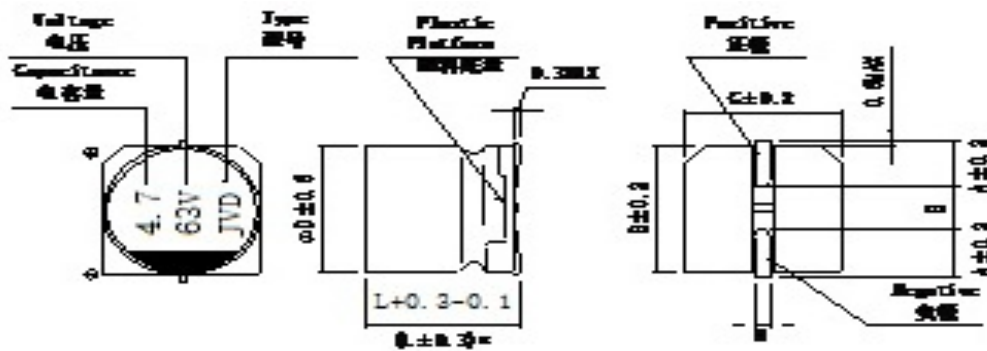

2. $\phi 8 \sim \phi 18$

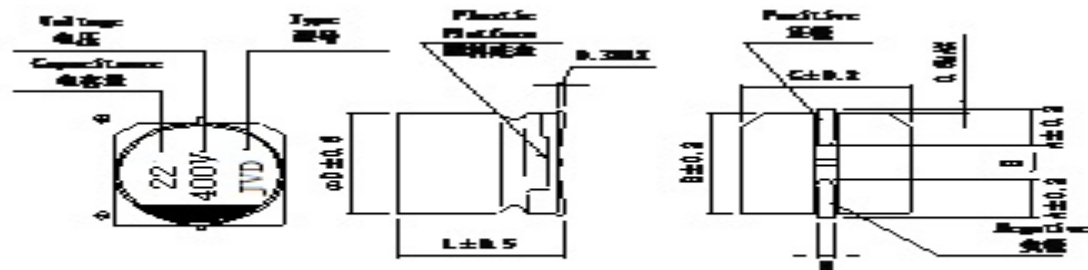

单位:mm

ΦD	4×5.4	5×5.4	6.3×5.4	6.3×7.7	6.3×10.5	8×10.5	8×12.5	10×10.5	10×12.5	12.5×13.5	12.5×16.5	16×16.5	18×16.5	18×21.5	
A	1.8	2.1	2.4	2.4	2.4	2.9	2.9	3.2	3.2	4.8	4.8	5.8	6.8	6.8	
B	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3	10.3	13	13	17	19	19	
C	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3	10.3	13	13	17	19	19	
E	1.0	1.3	2.2	2.2	2.2	3.1	3.1	4.5	4.5	4.4	4.4	6.4	6.4	6.4	
L	5.4	5.4	5.4	7.7	10.5	10.5	12.5	10.5	12.5	13.5	16.5	16.5	16.5	21.5	
H	0.5~0.8					0.8~1.1					1.1~1.4				

三、 技术性能 Specifications

项目 Items	特性 Characteristics							
工作温度范围 Operating Temperature Range	-40 ~ 105°C (160~450V)							
额定电压范围 Rated Voltage Range	160 ~ 450V							
标称容量范围 Nominal Capacitance Range	1 ~ 680 μF							
标称容量允许偏差 Nominal Capacitance Tolerance	±20% (20 °C 120Hz)							
漏电流 Leakage Current	160~450V							
	$I \leq 0.400(\mu A)$ C_R : 标称容量 (μF) U_R : 额定电压 (V) Whichever is greater(at 20 °C, After 2 minutes) C_R : Nominal Capacitance (μF) U_R : Rated voltages (V)							
损耗角正切 (tgδ) Dissipation Factor (Max) 20 °C 20Hz	U_R (V)	160	200	250	400	420	450	
	tgδ	0.20	0.20	0.20	0.15	0.15	0.15	

四、称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

V μF	160		200		250		400	
	D×L mm	I~mA	D×L mm	I~mA	D×L mm	I~mA	D×L mm	I~mA
1	6.3*10.5	25	6.3*10.5	22	6.3*10.5	22	6.3*10.5	25
2.2	6.3*10.5	35	6.3*10.5	32	6.3*10.5	32	6.3*10.5	35
							8*10.5	45
3.3	6.3*10.5	45	6.3*10.5	42	6.3*10.5	42	8*10.5	50
4.7	6.3*10.5	52	6.3*10.5	50	6.3*10.5	50	8*10.5	60
	8*10.5	60	8*10.5	55	6.3*10.5	55	8*12.5	65
5.6	6.3*10.5	57	6.3*10.5	55	8*10.5	55	10*10.5	75
6.8	6.3*10.5	60	6.3*10.5	55	8*12.5	75	8*12.5	75
	8*10.5	70	8*10.5	65	8*10.5	85	10*10.5	82
							10*12.5	90
10	8*10.5	90	8*10.5	85	8*12.5	100	10*12.5	110
12	8*10.5	95	8*10.5	90	8*12.5	110	10*12.5	120
15	8*10.5	110	8*12.5	110	10*12.5	150	12.5*13.5	150
22	10*10.5	150	10*10.5	140	12.5*13.5	215	12.5*16.5	200
33	10*12.5	195	10*12.5	185	12.5*13.5	260	16*16.5	290
47	12.5*13.5	275	12.5*13.5	260	12.5*13.5	280	16*16.5	345
56	12.5*13.5	300	12.5*13.5	280	16*16.5	390	18*16.5	200
68	12.5*13.5	330	12.5*16.5	340	16*16.5	475		
100	16*16.5	500	16*16.5	480	18*16.5	620		


V μF	420		450					
	D×L mm	I~mA	D×L mm	I~mA				
1	6.3*10.5	20	6.3*10.5	20				
2.2	6.3*10.5	30	6.3*10.5	30				
3.3	8*10.5	41	8*10.5	41				
4.7	8*12.5	53	10*10.5	56				
5.6	8*12.5	58	10*10.5	62				
6.8	10*10.5	67	10*10.5	67				
10	10*12.5	90	12.5*13.5	105				
12	12.5*13.5	115	12.5*13.5	115				
15	12.5*13.5	130	12.5*13.5	125				

I~=Rated ripple current (mA) (105°C, 120Hz) I~=额定纹波电流 (mA) (105°C, 120Hz 额定纹波电流的频率系数

Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	≥ 10KHz
Coefficient 系数	0.80	1.00	1.25	1.40	1.60

五构造图及材料表 Frame drawing and materials

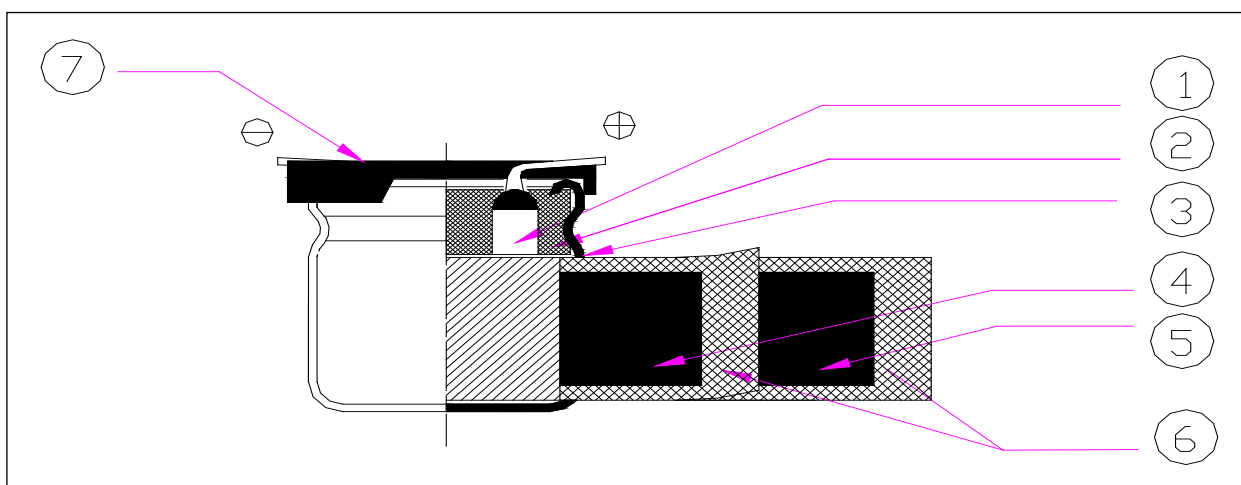

序号 No.	部件名称 Parts	材料名称 Material	主要供应厂家名称 Main supply Factory
1	引出线	铝线 LG3+镀锡铜钢线 AL- wire LG3+Tin- plating of copper cover steel	全用电子有限公司 QUANYONG ELECTRONIC CO., LTD.
2	橡胶塞	丁基橡胶 IIR rubber	韩国 JCC JCC, Co. (KOREA)
3	PE 铝壳 PE- CASE	99.5%纯度铝 AL -99.5%	韩国 DN DN CO.(KOREA)
4	阳极箔 AL – foil(+)	99.99%或 99.98%形成 铝箔 Formed AL 99.98% or 99.98%	日本 JCC 公司 JCC Co. (JAPAN)
5	阴极箔 AL – foil(-)	99.7%铝箔 Etched AL 99.7%	韩国 JCC 公司 JCC Co. (KOREA)
6	电解纸 Separstor paper	电解电容器纸 Electrolytic Capacitor paper	日本 NKK 公司 NKK Co.(Japan)
7	座板 BASE	PPS	韩国 JS 公司 JS Co.(KOREA)

六、试验方法及要求 Tests

1	系列号(SERIES)	CDJVD 系列(CDJVD SERIES)																					
2	额定电压 (rated voltage)	160~450V																					
3	工作温度范围 Operating temperature range operating	<p>工作温度范围是指电容器在额定电压下能持续工作的所允许外部环境的温度范围</p> <p>operating temperature range is the range of ambient temperature at which the capacitor can be operated continuously at rated voltage</p> <p>SPEC: -40~+105℃ (160~450V)</p>																					
4	电容容量 capacitance	测量等效电路图 measuring circuit equivalent series circuit																					
		测量温度 20 °C	measuring temperature																				
		测量频率 120HZ	measuring frequency																				
		测量电压 0.5Vrms	measuring voltage																				
	标称电容容量允许偏差:±20% MAX	Nominal Capacitance Tolerance:±20% MAX																					
5	损耗角正切 tangent of the loss angle	<p>损耗角正切的测量应要和测量电容容量一样的条件下进行</p> <p>Measurement should be made under the same conditions as those given for the measurement of capacitance</p> <p>SPEC:</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td>损耗角正切 (tgδ)</td> <td>U_R (V)</td> <td>160</td> <td>200</td> <td>250</td> <td>400</td> <td>420</td> <td>450</td> </tr> <tr> <td></td> <td>tgδ</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> </tr> </table>						损耗角正切 (tgδ)	U _R (V)	160	200	250	400	420	450		tgδ	0.20	0.20	0.20	0.15	0.15	0.15
损耗角正切 (tgδ)	U _R (V)	160	200	250	400	420	450																
	tgδ	0.20	0.20	0.20	0.15	0.15	0.15																
6	漏电流 leakage current	将额定电压加在电容和 1000±100Ω 的保护电阻上。在充电 2 分钟后，按下列等式计算漏电流																					
		160~450V																					
		<p>$I \leq 100400(uA) C_R$: 标称电容容量 (μF)</p> <p>U_R: 额定电压 (V)</p> <p>Whichever is greater(at 20 °C,After 2 minutes)</p> <p>C_R: Nominal Capacitance (μF) U_R: Rated voltages (V)</p>																					
7	允许最大纹波电流 Maximum permissible ripple current	<p>在规定的某一频率下的最大交流电流，在该电流下电容器连续工作。即使在测过第 16 项下的耐久性后，此要求仍要满足。在此，DC 电压加上最大纹波电压小于等于额定电压。</p> <p>The maximum sinusoidal alternating current of a frequency specified below, at which the capacitor can be operated continuously. This requirement shall be satisfied even after the measurement of clause 16(electrical endurance) Where(DC voltage +peak ripple voltage)≤rated voltage</p>																					

接上表

8	温度特性 Characteristics of temperature	<table border="1"> <thead> <tr> <th>步骤 step</th> <th>温度 temperature</th> <th>持续时间 Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20±2 °C</td> <td>15 分钟 15 min</td> </tr> <tr> <td>2</td> <td>最低工作温度 minimum operating temperature</td> <td>2 小时 2 hours</td> </tr> <tr> <td>3</td> <td>20±2 °C</td> <td>15 分钟 15 min</td> </tr> <tr> <td>4</td> <td>最高工作温度 maximum operating temperature</td> <td>2 小时 2 hours</td> </tr> </tbody> </table> <p>步骤 1: 测量容量, 损耗角正切和阻抗 Step1: Capacitance, tangent of the loss angle impedance shall be measured.</p> <p>步骤 2: 在电容器存放 2 小时后, 测量容量, 损耗角正切和阻抗 Step2: After the capacitor being stored for 2hours, Capacitance, tangent of the loss angle and impedance shall be measured.</p> <p>步骤 3: 电容器在 20±2 °C 存放 15 分钟 Step3: The capacitor being stored fro 15min at 20±2 °C</p> <p>步骤 4: 在电容器存放 2 小时后, 测量容量和漏电流。 Step4: After the capacitor being stored for 2hours, capacitance and leakage current shall be measured</p> <table border="1"> <thead> <tr> <th>额定电压 rated voltage</th> <th>200</th> <th>250</th> <th>400</th> <th>420</th> <th>450</th> <th></th> </tr> </thead> <tbody> <tr> <td>Z(-25 °C/20 °C)</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> <td></td> </tr> <tr> <td>Z(-40 °C/20 °C)</td> <td>6</td> <td>6</td> <td>10</td> <td>10</td> <td>10</td> <td></td> </tr> <tr> <td>Z(-55°C/Z(+20 °C)</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> <td></td> </tr> </tbody> </table>	步骤 step	温度 temperature	持续时间 Duration	1	20±2 °C	15 分钟 15 min	2	最低工作温度 minimum operating temperature	2 小时 2 hours	3	20±2 °C	15 分钟 15 min	4	最高工作温度 maximum operating temperature	2 小时 2 hours	额定电压 rated voltage	200	250	400	420	450		Z(-25 °C/20 °C)	3	3	6	6	6		Z(-40 °C/20 °C)	6	6	10	10	10		Z(-55°C/Z(+20 °C)	-----	-----	-----	-----	-----	
		步骤 step	温度 temperature	持续时间 Duration																																									
1	20±2 °C	15 分钟 15 min																																											
2	最低工作温度 minimum operating temperature	2 小时 2 hours																																											
3	20±2 °C	15 分钟 15 min																																											
4	最高工作温度 maximum operating temperature	2 小时 2 hours																																											
额定电压 rated voltage	200	250	400	420	450																																								
Z(-25 °C/20 °C)	3	3	6	6	6																																								
Z(-40 °C/20 °C)	6	6	10	10	10																																								
Z(-55°C/Z(+20 °C)	-----	-----	-----	-----	-----																																								
9	浪涌测试 Surge test	<p>在规定温度下, 循环测试 1000 次, 每次充电 30±5 秒, 在放电大约 5 分 30 秒。在标准温度条件下存放使其稳定, 然后测试。 The capacitor shall be subjected to 1000cycles at a temperature specified below, each consisting of a charge period of 30±5sec, followed by a discharge period of approx. 5min30sec. And the capacitor shall be stored under standard conditions thermal to obtain stability,after which measurements shall be made.</p> <p>measurement circuit(测试电路图)</p> <table border="1"> <tr> <td rowspan="3"> </td> <td>VS:浪涌电压 Surge voltage</td> <td>V1:直流电压 DC voltmeter</td> </tr> <tr> <td>R1:保护电阻 (1KΩ) Protective series resistor</td> <td>R2:放电电阻器 Discharge resistor</td> </tr> <tr> <td>CX:测试电容 Test capacitor</td> <td>S:开关 Switch</td> </tr> </table> <p>SPEC: 1) $\Delta C/C \leq 15\%$ 2) $\text{tg}\delta < \text{规定值}$ 3) 电压</p> <table border="1"> <thead> <tr> <th>RATED VOLTAGE(V_{DC})</th> <th>200</th> <th>250</th> <th>400</th> <th>420</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>SURGE VOLTAGE(V_{DC})</td> <td>250</td> <td>300</td> <td>450</td> <td>470</td> <td>500</td> </tr> </tbody> </table>		VS:浪涌电压 Surge voltage	V1:直流电压 DC voltmeter	R1:保护电阻 (1KΩ) Protective series resistor	R2:放电电阻器 Discharge resistor	CX:测试电容 Test capacitor	S:开关 Switch	RATED VOLTAGE(V _{DC})	200	250	400	420	450	SURGE VOLTAGE(V _{DC})	250	300	450	470	500																								
	VS:浪涌电压 Surge voltage	V1:直流电压 DC voltmeter																																											
	R1:保护电阻 (1KΩ) Protective series resistor	R2:放电电阻器 Discharge resistor																																											
	CX:测试电容 Test capacitor	S:开关 Switch																																											
RATED VOLTAGE(V _{DC})	200	250	400	420	450																																								
SURGE VOLTAGE(V _{DC})	250	300	450	470	500																																								

接上表

10	端子强度 Terminal strength	<p>1) 拉力(tensile)</p> <table border="1" data-bbox="464 333 1449 510"> <thead> <tr> <th>d(mm)</th> <th>[N]</th> <th>Duration time</th> </tr> </thead> <tbody> <tr> <td>0.3<d≤0.5</td> <td>5</td> <td rowspan="3">10±2sec(秒)</td> </tr> <tr> <td>0.5<d≤0.8</td> <td>10</td> </tr> <tr> <td>0.8<d≤1.25</td> <td>20</td> </tr> </tbody> </table> <p>2) 抗弯强度 (Bending) 端子应该在每一方向上折弯一次，总共两次 The terminal shall be subjected to 1 bend in each direction to give a total 2 bends.</p> <table border="1" data-bbox="464 633 1449 810"> <thead> <tr> <th>d(mm)</th> <th>[N]</th> </tr> </thead> <tbody> <tr> <td>0.3<d≤0.5</td> <td>2.5 (0.25KG)</td> </tr> <tr> <td>0.5<d≤0.8</td> <td>5.0 (0.51KG)</td> </tr> <tr> <td>0.8<d≤1.25</td> <td>10.0(1.0KG)</td> </tr> </tbody> </table> <p>端子没有破损或松动 SPEC: No breaking and loosening of terminal</p>	d(mm)	[N]	Duration time	0.3<d≤0.5	5	10±2sec(秒)	0.5<d≤0.8	10	0.8<d≤1.25	20	d(mm)	[N]	0.3<d≤0.5	2.5 (0.25KG)	0.5<d≤0.8	5.0 (0.51KG)	0.8<d≤1.25	10.0(1.0KG)
d(mm)	[N]	Duration time																		
0.3<d≤0.5	5	10±2sec(秒)																		
0.5<d≤0.8	10																			
0.8<d≤1.25	20																			
d(mm)	[N]																			
0.3<d≤0.5	2.5 (0.25KG)																			
0.5<d≤0.8	5.0 (0.51KG)																			
0.8<d≤1.25	10.0(1.0KG)																			
11	可焊性 solderability	<p>焊料(Solder) : H60A. H60S or(或)H63A 焊接温度(Solder temperature) : 245±2 °C 浸入时间(Immersion time) : 3±0.5sec(秒) 浸入深度(Immersion depth) : 2mm 熔化: 松香在酒精的浓度是 25% Flux: 25% by weight of rosin in ethanol 从含浸处到顶部，至少要有 3/4 的部分覆盖有新焊料 SPEC:1) 3/4 of the circumference of the surface up to the immersed shall be covered with new solder.</p>																		
12	耐焊接热 Resistance to soldering heat	<p>焊料(Solder) : H60A. H60S or(或)H63A 焊槽温度(Solder temperature) : 260±5 或(或)350±10 °C 浸入时间(Immersion time) : 10±1sec(秒) (或 3.5±0.5sec) 绝热屏蔽板的厚度 (Thickness of heat shunt:1.6mm) : 1.6mm SPEC:1) 电容量变化 Change in capacitance: ±10%初始值以内 Within±10% of the initial value 2) 损耗角正切 tangent of the loss angle: 小于等于初始规定值 The initial specified value or less 3) 漏电流 leakage current: 小于等于初始规定值 The initial specified value or less</p>																		
13	抗振性 Vibration	<p>试验电容器的耐振性。在整个频率范围内，从 10 赫兹到 55 赫兹，然后再返回到 10 赫兹，就这样在一分钟内往返循环。振幅为 1.5mm。在三个垂直方向上，每一方向要持续 2 小时，总共 6 小时 Only endurance conditioning by sweeping shall be made. The entire frequency range, from 10 to 55Hz and return to 10Hz, shall be transversed in 1min. Amplitude(total excursion)1.5mm, This motion shall be applied for a period of 2hours in each of 3 mutually perpendicular directions(a total of 6 hours) SPEC:1) 电容量的变化(change in capacitance) : ±5%初始值以内(within ±5% of the initial value) 2) 无可见损伤(No visible damage)</p>																		

接上表


14	<p>稳态湿热 Damp heat</p>	<p>电容器要在温度 40 ± 2 °C相对湿度 90%到 95%条件下存放 240 ± 8 个小时。然后在标准条件下放 1 到 2 小时后进行测量。the capacitor shall be stored at a temperature of 40 ± 2 °C and relative humidity of 90 to 95% and be subjected to standard atmospheric conditions for 1 to 2hours, after which measurements shall be made</p> <p>SPEC:1) 电容量的变化 change in capacitance: $\pm 15\%$初始值以内 within $\pm 15\%$ of the initial value;</p> <p>2) 损耗角正切 tangent of loss angle: 小于等于初始规定值 The initial specified value or less;</p> <p>3) 漏电流 leakage current: 小于等于初始规定值 The initial specified value or less</p>
15	<p>高温储存 shelf life</p>	<p>在 105 °C度下不外加电压贮存, 电容器存放 1000 小时。然后在标准条件下放 1 到 2 小时后进行测量, 并且在测漏电流前, 必须满足下列条件。The capacitor shall be stored at 105 °C shall be applied. And then the capacitor shall be subjected to standard atmospheric conditions for 1 to 2hours, after which measurements shall be made, Prior to the measurement of leakage current, following conditioning may be made.</p> <p>SPEC:1) 电容量的变化 change in capacitance: $\pm 30\%$初始值以内 within $\pm 30\%$ of the initial value;</p> <p>2) 损耗角正切 tangent of loss angle: $\pm 300\%$初始规定值以内 within $\pm 300\%$ of the initial value;</p> <p>3) 漏电流 leakage current: 小于等于初始规定值 The initial specified value or less</p>
16	<p>耐久性 load life</p>	<p>在 105 ± 2 °C, 电容器加额定电压 2000~8000 小时。在标准条件下放 1 到 2 小时后进行测量。</p> <p>The rated voltage shall be applied continuously to the capacitor at maximum operating temperature 105 ± 2 °C standard atmospheric conditions for 1to 2hours, after which measurement shall be made.</p> <p>$\Phi D=4, 5$ 和 6.3 为 2000 小时; $\Phi D=8, 10$ 为 5000 小时; $\Phi D=12.5, 16$ 和 18 为 8000 小时</p> <p>SPEC:1) 电容量的变化 change in capacitance: $\pm 30\%$初始值以内 within $\pm 30\%$ of the initial value;</p> <p>2) 损耗角正切 tangent of loss angle: $\pm 300\%$初始规定值以内 within $\pm 300\%$ of the initial value;</p> <p>3) 漏电流 leakage current: 小于等于初始规定值 The initial specified value or less</p>

七、标志 Marking (见外形图及尺寸表)

说明：标识中的“JVD”是贴片产品的专属标识。


Information: The mark of “JVD” is the special mark for SMD Type of 片式铝电解电容的编带

V- Chip Type Aluminum Electrolytic Capacitors
编带 Carrier tape

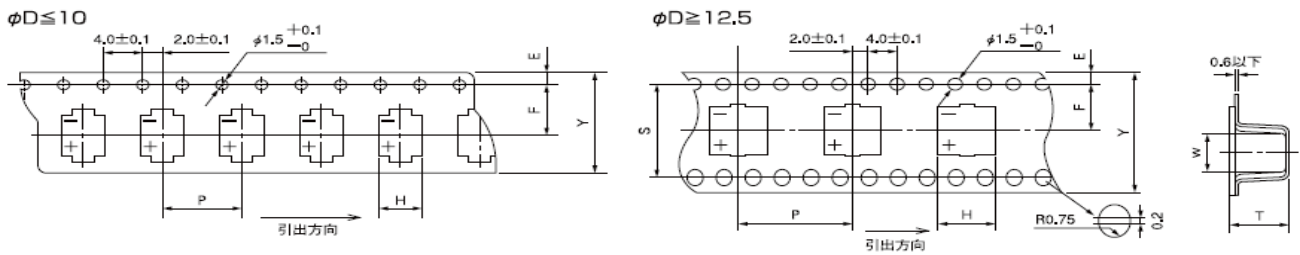

ΦD×L	4×5.4	5×5.4	6.3× 5.4	6.3× 7.7	6.3* 10.5	8× 10.5	8× 12.5	10× 10.5	10× 12.5	12.5× 13.5	12.5× 16.5	16× 16.5	18× 16.5	18× 21.5	(mm)
W	12.0	12.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	32.0	32.0	44.0	44.0	44.0	
P	8.0	12.0	12.0	12.0	12.0	16.0	16.0	16.0	16.0	24.0	24.0	28.0	32.0	32.0	
F	5.5	5.5	7.5	7.5	7.5	11.5	11.5	11.5	11.5	14.2	14.2	20.2	20.2	20.2	
A ₀	5.0	6.0	7.0	7.0	7.0	8.7	8.7	10.7	10.7	13.2	13.2	17.5	19.5	19.5	
B ₀	5.0	6.0	7.0	7.0	7.0	8.7	8.7	10.7	10.7	13.2	13.2	17.5	19.5	19.5	
T ₂	5.8	5.8	5.8	8.0	11.0	11.0	13.3	11.0	13.3	14.3	17.3	17.3	17.8	22.5	

■ 编带包装盘 Reel

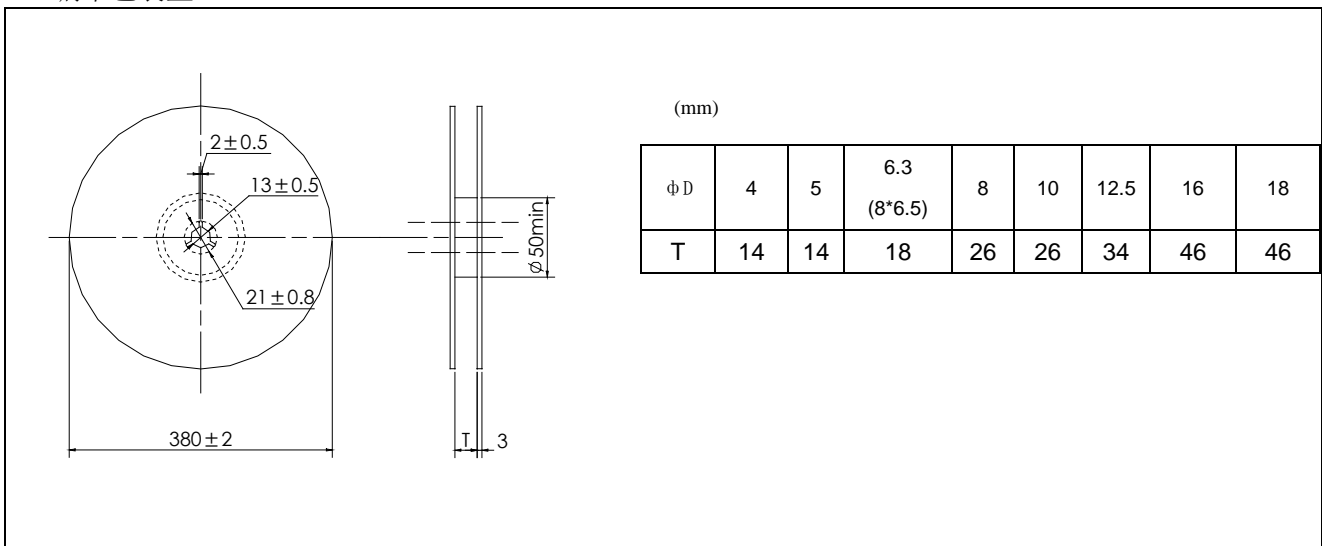

$\Phi D \times L$	Quantity / Reel 数量 / 每盘	pcs/ Small packing box 数量/小包装箱	pcs/Large packing box 数量/大包装箱
4×5.4	2000pcs	24000pcs	48000pcs
5×5.4	1000pcs	12000pcs	24000pcs
6.3×5.4、6.3×7.7、8×6.5	1000pcs	10000pcs	20000pcs
8×10.5、10×10.5	500pcs	3500pcs	7000pcs
6.3×10.5	800pcs	8000pcs	16000pcs
8×12.5	400pcs	2800pcs	5600pcs
10×12.5	400pcs	2800pcs	5600pcs
12.5×13.5	250pcs	2500pcs	5000pcs
12.5×16.5	200pcs	800pcs	1600pcs
16×16.5	200pcs	800pcs	1600pcs
18×16.5	175pcs	700pcs	1400pcs
18×21.5	125pcs	500pcs	1000pcs

■ Package quantity 包装数量